


Vehicle transport wagon type 559 Laes

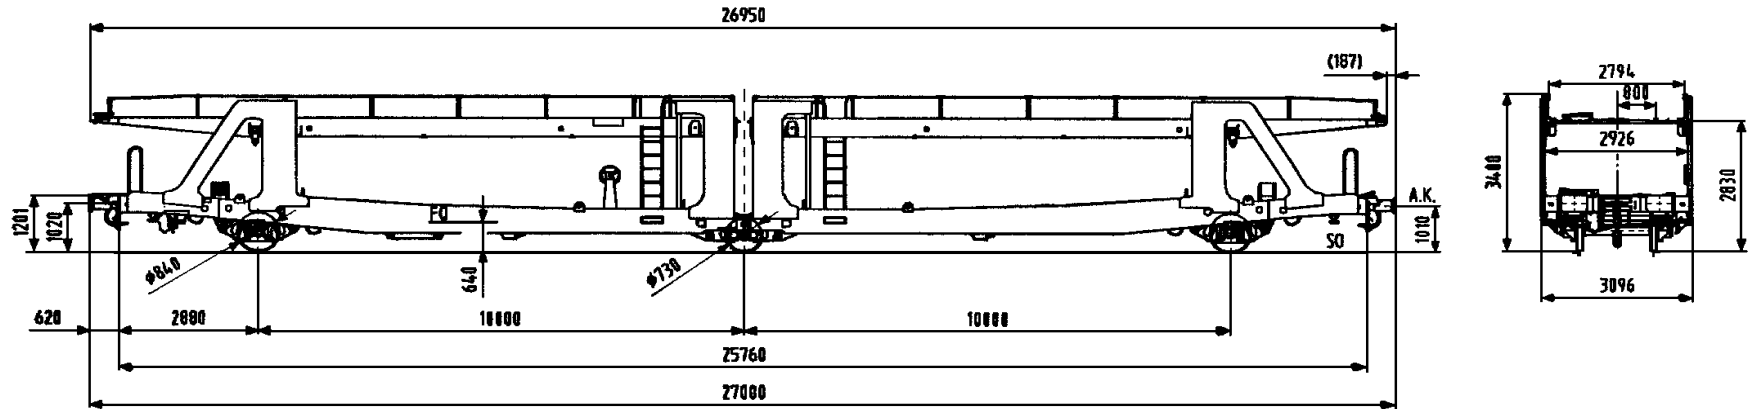

Maximum load per unit

	A	B	C
S	19,5	20,0	
120	0,00		

Average empty weight

28,2 t

Length over buffers

27.000 mm

Height above rail level

640 mm

Minimum curved track radius

75 m

Mobile wagon components

2 crank handles

Number / type of wheel stoppers

56 hinged wheel stoppers

International usage

RIV

Upper deck completely lowerable

lower deck

upper deck

Loading height

see back page

Loading gauge height

see back page

Loading length

26.160 mm

26.640 mm

Loading width

3.000 mm

2.794 mm

Gauge (exterior)

2.070 mm


2.070 mm

Weight of load (max. 20,0 t)

12,0 t

12,0 t

Vehicle transport wagon type 559 Laes

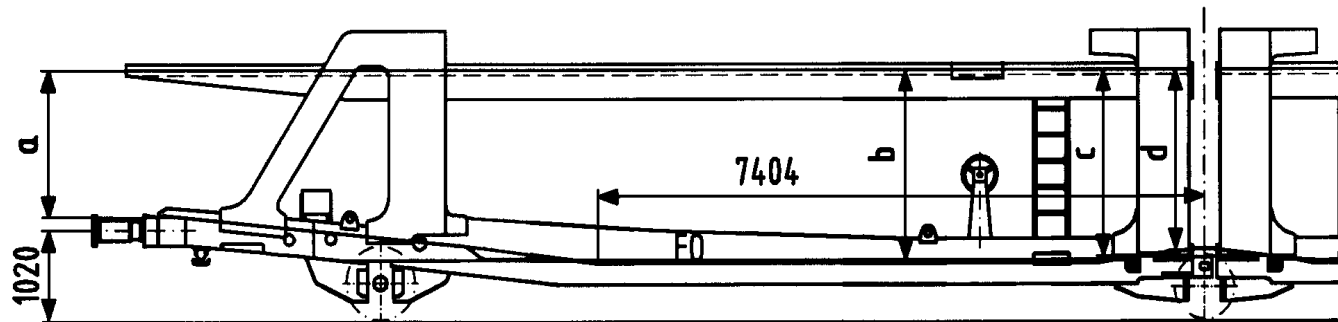

Upper deck in position	Clearance height of lower deck (mm)				Maximum loading gauge of upper deck (mm) in				
	a	b	c	d	Germany	France	Italy	Belgium	Switzerland
1	1.153	1.671	1.580	1.515	2.302	1.932	1.952	2.252	2.152
2	1.203	1.721	1.630	1.565	2.252	1.882	1.902	2.202	2.102
3	1.253	1.771	1.680	1.615	2.202	1.832	1.852	2.152	2.052
4	1.303	1.821	1.730	1.665	2.152	1.782	1.802	2.102	2.002
5	1.353	1.871	1.780	1.715	2.102	1.732	1.752	2.052	1.952
6	1.403	1.921	1.830	1.765	2.052	1.682	1.702	2.002	1.902
7	1.508	2.026	1.935	1.870	1.947	1.577	1.597	1.897	1.797
8	1.558	2.076	1.985	1.920	1.897	1.527	1.547	1.847	1.747
9	1.623	2.141	2.050	1.985	1.832	1.462	1.482	1.782	1.682
10	2.130	Loading position		2.085	-	-	-	-	-
0 Completely lowered	-	-	-	-	3.152	2.782	2.802	3.102	3.002